


Fresa circular, corte 3 lados e dentado extra fino.  
 Fresa circular, corte 3 lados y dentado extra fino.  
 Side milling cutter, cutting on 3 sides, extra fine teeth.

HSS (M2)

d1 js 16 pol	b k 11 pol	d2 H7 pol
2 1/2	3/32 1/8 5/32 3/16 7/32 1/4	7/8
3	3/32 1/8 5/32 3/16 7/32 1/4	1
4	3/32 1/8 5/32 3/16 7/32 1/4	1 1/4
5	1/8 5/32 3/16 7/32 1/4 5/16	1 1/4
6	1/8 5/32 3/16 7/32 1/4 5/16	1 1/4
8	3/16 7/32 1/4 5/16 3/8	1 1/2

d1 js 16 mm	b k 11 mm	d2 H7 mm
63	2,5 3 4 5	22
80	2,5 3 4 5 6	27
100	2,5 3 4 5 6	32
125	2,5 3 4 5 6	32
160	3 4 5 6	40
200	4 5 6	40

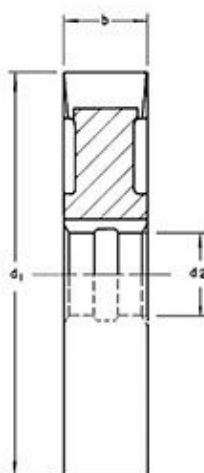

**1203**

DIN 1834 B-N  
 dentes retos  
*dientes rectos*  
 straight teeth



**1213**

DIN 1834 A-N  
 dentes cruzados, alternados  
 ângulo de hélice ~ 14°  
*dientes cruzados alternados*  
 ángulo de la hélice ~ 14°  
 staggered teeth  
 helix angle ~ 14°

Ex. de especificação: 1203 - 63 x 3 x 22